


RECOMMEND P.C.BOARD HOLE LAYOUT

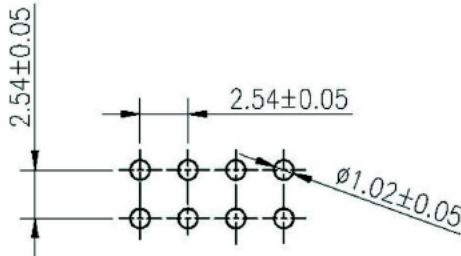

1. MATERIAL:
- 1.1 INSULATOR: PBT UL94-0
 - 1.2 CONTACT: COPPER ALLOY
2. CHARACTERISTICS:
- 2.1 CURRENT RATING : 1.5A
 - 2.2 CONTACT RESISTANCE: INITIAL: $20\text{m}\Omega$ MAX
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE : 500V
 - 2.4 INSULATOR RESISTANCE: INITIAL: $1000\text{M}\Omega$ MIN
3. OPERATING TEMP RANGE: -40°C TO $+105^\circ\text{C}$

| | | | |
|-----------------|-------------|--|---|
| RoHS Compliant | | SCHMID-M | |
| APPD. Betty | SCALE | TOLERANCE .0 ±0.38 .00 ±0.25 ANG. ±5° | PART NAME 2.54mm PIN HEADER DUAL ROW XX P STRAIGHT TYPE (C=6.0mm D=3.0mm)LOW LEAD |
| DWG. Betty | UNIT M M | SIZE. A 4 | PART NO. SM C02 2100 XX BS |
| DATE 2017/02/22 | PAGE 1 OF 1 | REV. A | |