



4-8P

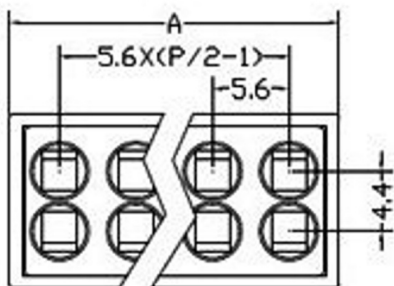

Poles	4P	6P	8P
A	13.1	18.6	24.1



Standard	UL	IEC
Rated voltage	300V	400V
Rated current	15A	24A
Wire range	24-12AWG	0.2-2.5mm <sup>2</sup>
Withstanding voltage	AC2500V/1Min	
Ambient temperature	-40°C~+105°C	
Strip length	8-9mm	
Pitch	5.60mm(.374")	
Poles	2P	
Housing	PA66+5%GF.,UL94V-0	
Pin header	Phosphor Bronze	
Wire guard	Stainless steel	

RoHS Compliant		<b>SCHMID-M</b>	
APPD.		TOLERANCE	PART NAME
DWG. GRAY	SCALE	.0 ± .00 ± ANG. ±	Terminal Block, Spring Style, Pitch 5,60mm, PCB Straight, XX..... Nr. Pins
DATE	UNIT M M	SIZE A 4	PART NO.
2014/01/28	PAGE 1 OF 1	REV. A	SM C09 3352 XX SC1Y