



RECOMMEND P.C BOARD HOLE LAYOUT

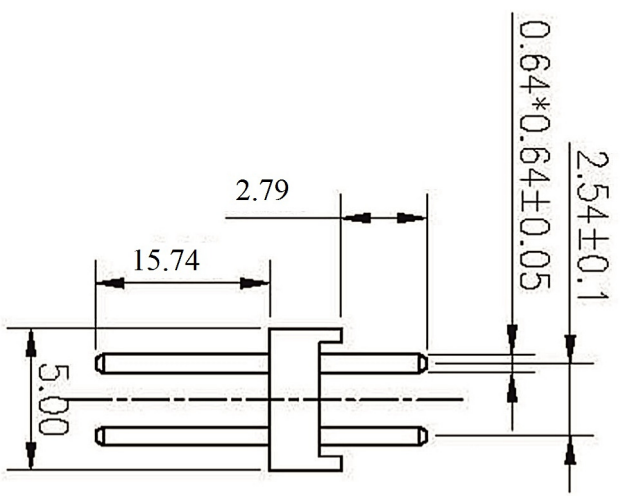

1. MATERIAL:
- 1.1 INSULATOR: PBT UL94-0
  - 1.2 CONTACT: COPPER ALLOY
2. CHARACTERISTICS:
- 2.1 CURRENT RATING: 1.5A
  - 2.2 CONTACT RESISTANCE: INITIAL: 20mΩ MAX
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V
  - 2.4 INSULATOR RESISTANCE: INITIAL: 1000MΩ MIN
3. OPERATING TEMP RANGE: -40 °C T<sub>0</sub> +105 °C

ROHS  
Compliant

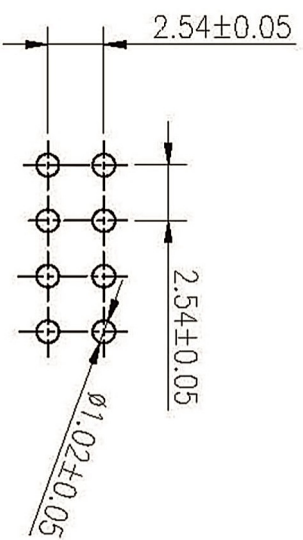

APP'D:	Betty	SCALE:	0.00	TOLERANCE:	±0.38	PART NAME:	2.54mm PIN HEADER DUAL ROW
DWG:	Betty	UNIT:	M M	ANG:	±0.25	XX P STRAIGHT TYPE	(C=15.74, D=2.79mm)
DATE:	2008/06/12	PAGE:	1 OF 1	SIZE:	A 4	LOW LEAD	
		REV:	A			PART NO.	SM C02 2200 40 BS

	1	2	3	4	5	6	7	8
A								
B								
C								
D								
E	<p>RECOMMEND P.C BOARD HOLE LAYOUT</p>							
F								
G								
H								
	1	2	3	4	5	6	7	8