
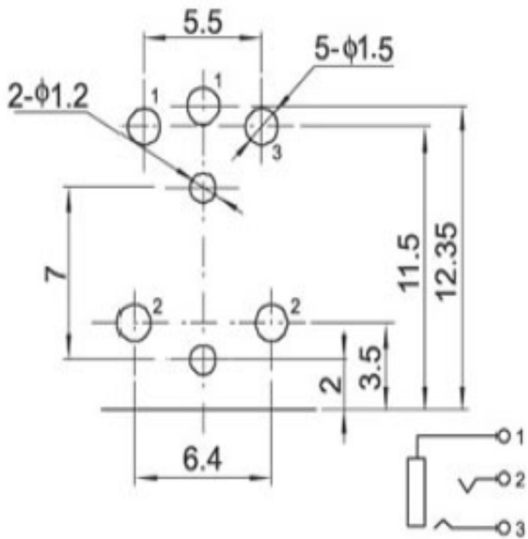
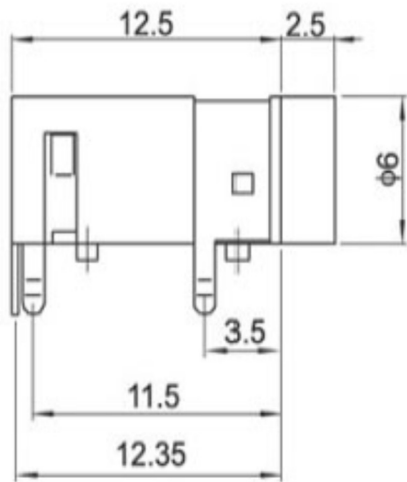


Temperature:	-20 ~ 70°C	Withstand Voltage:	AC500V(50Hz)/min
Rated Load:	DC 30V 0.3A	Insertion and Extaction Force	3 ~ 30N
Contact Resistance:	< 0.03Ω	Life:	>5000
Insulation Resistance:	> 100MΩ		

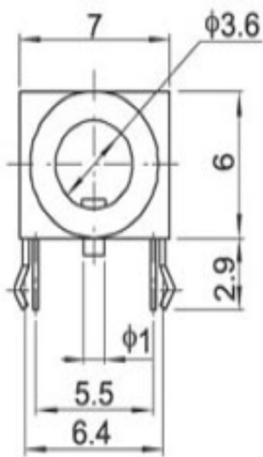

RoHS Compliant		SCHMID-M		PART NAME	
APPD.	HELEN		TOLERANCE .000 ±0.13 ANG±3° .00 ±0.25 .0 ±0.38	PART NO. SM C04 0352 B	
DWG.	ABBY				
DATE	2011/08/05	UNIT	SIZE.		
		M M	A 4		
		PAGE	REV.		
		1 OF 1	A		